

## FRP Housing




## Specifications


Size, "(inch):	20", 40", 60"
Filtration rating, $\mu\text{m}$ :	0,5, 1, 5, 10, 20, 50, 100
Flowrate, l/min:	See Schedule below
Max. Temp. C°:	-
Design Pressure:	10bar
Efficiency, %:	-
Connection:	3" / Side port / end port / by couplings
Material:	FRP
O-ring:	EPDM, NBR

Suitable for high flow cartridge filters

- Easy installation, quick change-out without dismounting pipeline
- Ultra high strength of corrosion resistance, perfect option for sea water
- Modular design, smaller footprint, compact and movable
- Beautifully matched with FRP membrane vessels
- Low Maintenance Costs

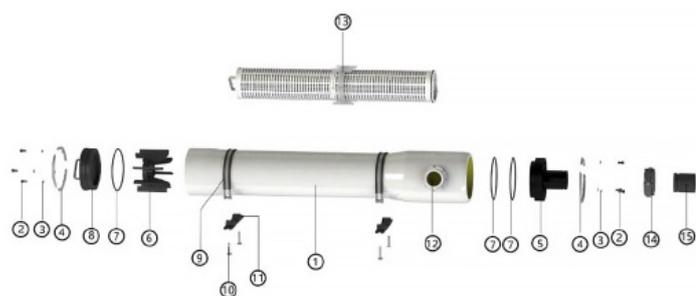

## Flow Rates

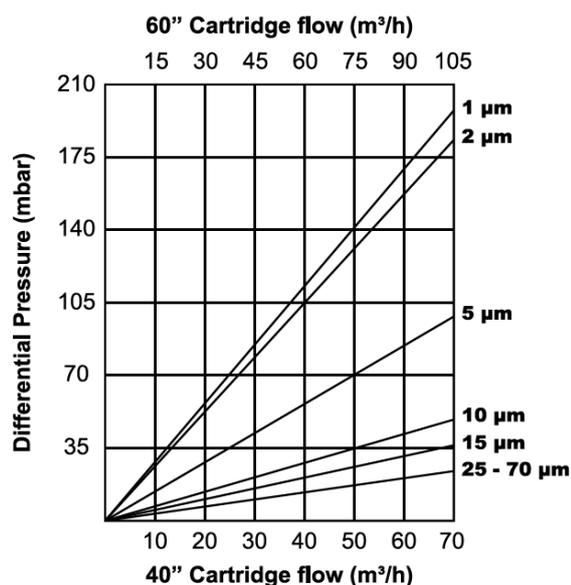

## Parts

1	vessel shell	6	thrust ring	11	saddle
2	locking kit	7	seal o-ring	12	side port
3	spring rod	8	end cap	13	guiding ring
4	block plate	9	strap	14	DN80 coupling
5	inlet end cap	10	strap screw	15	DN80 short pipe

## Specifications

Length	Inlet / Outlet	Connection options	Connection with Pipeline	Shell	Side port	End Caps
20"/40"/60"	3"	Side port / End port	by couplings	FRP	Nylon	ABS