

Vortex Flow Meter

For gas and steam

Key Features

- Vortex flow meter – suitable for gas and steam
- IP65 rating
- Flow range:
 - 1.5 to 300 Nm/s
 - 5 to 931 ft/sec
- Accuracy: $\pm 1.5\%$ reading, $\pm 0.3\%$ full scale
- Integrated touch screen display
- Power Supply: 18 to 30 vDC
- Two outputs as standard:
 - Digital - Modbus RTU
 - Analog – 4...20 mA + Pulse
- Measure: standard flow, consumption, pressure and temperature

About

Vortex flow meters are perfectly suited for measuring flow and consumption of inert gases and steam, no matter how heavily contaminated.

With built-in pressure and temperature sensors, all parameters of your gas or steam system are monitored in one unit, saving you install and maintenance costs.

The turndown ratio of 1:53 goes well beyond traditional Vortex flowmeters.

An all-welded construction means the flow meter is resistant to corrosion, high pressure and temperature. Full digital signal processing for higher precision and better stability



Applications

- Manufacturing and industrial use
- Temporary or permanent installation
- Outdoor environments
- Gas pressure up to 16 bar (232 psi)
- Steam pressure up to 63 bar (913 psi)
- Pipe Sizes: DN15 to DN300

Specifications

Measurement Range

Flow Velocity	1.5 to 300 Nm/s 5 to 984 ft/sec	
Gas Temperature	Gas	Steam
	-40°C to +150°C -40°F to +302°F	-40°C to +280°C -40°F to +536°F
Gas Pressure	Gas	Steam
	0 to 16 bar 0 to 232 psi	0 to 63 bar 0 to 913 psi

Accuracy

Flow Accuracy	±(1.5% RD + 0.3% FS)
---------------	----------------------

Contact us for higher accuracy of ±1% RD

Repeatability	±0.2% RD
---------------	----------

Reference Conditions: 20 °C, 1 bar(a), ISO 1217 (editable)

Pressure Accuracy	±0.5% FS
-------------------	----------

Temperature Accuracy	±0.5 °C (±1.0 FS @ > 100 °C)
----------------------	------------------------------

The accuracy and response time of the sensor can be affected by the on-site conditions, contaminants in the gas and incorrect installation.

Working Environment

Ambient Temperature	-40 to +85°C -40°F to +185°F
---------------------	---------------------------------

Relative Humidity	0 to 95% RH
-------------------	-------------

Gas types	Dry /moist air and non-corrosive gases
-----------	--

Gas Quality	Clean and dry gas Wet and dirty gas
-------------	--

Display & Data Logger

Display	2.8" IPS ultra-wide viewing angle LCD touch screen
---------	--

Data Logging	No
--------------	----

Output

Analogue Output	4-20 mA (isolated) / Pulse output (cumulative)
-----------------	---

Digital Output	Modbus RTU (RS485)
----------------	--------------------

Output Signals	Flow, Consumption Pressure, Temperature
----------------	--

Full digital signal processing

Power Supply

Power Requirement - Measurements	18 to 30V DC/10W @ 24V
-------------------------------------	------------------------

Electrical Connection	1 × 5 pin M12, Female
-----------------------	-----------------------

Electromagnetic Compatibility	Meets IEC 61326-1
----------------------------------	-------------------

Other

Process Connection	Flange
--------------------	--------

Pipe Size	DN15 to DN300
-----------	---------------

IP Rating	IP65
-----------	------

Sensor Technology	Karman vortex principle
-------------------	-------------------------

Turndown Ratio	1:53
----------------	------

Bi-directional	No
----------------	----

Installation	Permanent or Temporary
--------------	------------------------

Calibration	Every 2 years
-------------	---------------

Annual calibration is required if the sensor is exposed to relative humidity above 85%.


Warranty	12 months
----------	-----------

HS Code	9026.80.80
---------	------------

Flow Range

Pipe Size		Flow Rate m/s	Vortex Flow Meter Flow Range (Nm ³ /h)		Flow Range (cfm)	
Inches	DN		Min Flow	Max Flow	Min Flow	Max Flow
1/2"	15	5.5 - 80	1.0	50.9	0.6	30.0
3/4"	20	5.0 - 80	3.1	90.4	1.0	53.2
1"	25	4.0 - 80	8.8	530	5	312
1.25"	32	3.0 - 80	14.5	868	9	511
1.5"	40	2.0 - 80	22.6	1,357	13	798
2"	50	1.5 - 80	35.3	2,120	21	1,247
2.5"	65	1.5 - 80	59.7	3,583	35	2,108
3"	80	1.5 - 80	90.5	5,428	53	3,193
4"	100	1.5 - 80	141.4	8,482	83	4,990
5"	125	1.5 - 80	220.9	13,253	130	7,797
6"	150	1.5 - 80	318.1	19,085	187	11,228
8"	200	1.5 - 80	565.5	33,929	333	19,962
10"	250	1.5 - 80	883.6	53,014	520	31,190
12"	300	1.5 - 80	1,272.3	76,340	749	44,913

How to Order

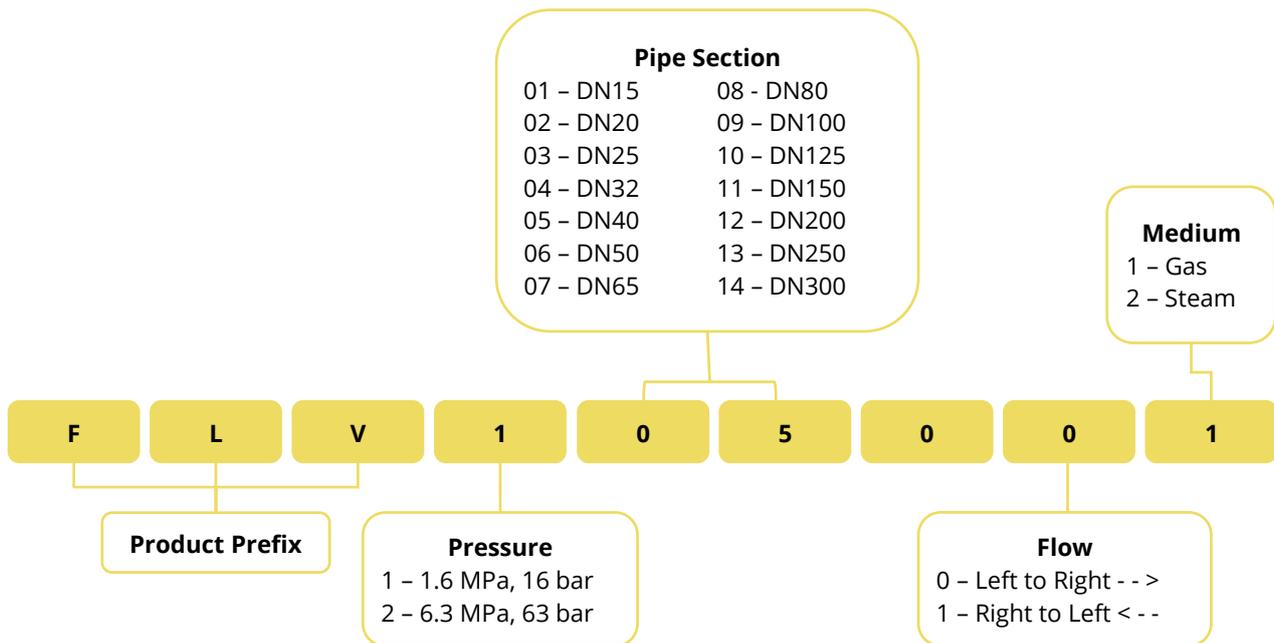

Flow Meter Range



Pitot Tube Flow Meter

Ideal for wet, dirty and high velocity gases.

Flow Range

5 to 300 Nm/sec (17 to 984 ft/sec)
Min Flow Velocity: 5 Nm/s (17 ft/sec)

Installation

Insertion

Pressure Range

0 to 16 bar (232psi)

Bi-directional

Optional

Gas Quality

Clean, dry, wet or dirty gas.

Outputs

Modbus & 4-20mA

Pipe Size

DN25 to DN600

IP Rating

IP65 (indoor use)



Thermal Mass

For clean, dry gas

Flow Range

0.1 to 250 Nm/sec (0.3 to 820 ft/sec)
Min Flow Velocity: 0.1 Nm/s (0.3 ft/sec)

Installation

Insertion

Inline - Flange or R-Thread connection

Pressure Range

Insertion: 0 to 50 bar (725psi)
Inline: 0 to 40 bar (580psi)

Bi-directional

No

Gas Quality

Clean dry gas
Must be installed after a dryer

Outputs

Modbus & 4-20mA

Pipe Size

Insertion - DN20 to DN600

Inline - DN15 to DN80

IP Rating

IP65 (indoor use) or IP67 (outdoor use)



Vortex Flow Meter

For use in gas and steam systems

Flow Range

1.5 to 80 m/s (5 to 24 ft/sec)
Min Flow Velocity: 1.5 Nm/s (4.9 ft/sec)

Installation

Inline - Flange or R-Thread connection

Pressure Range

0 to 63 bar (913psi)

Bi-directional

No

Gas Quality

Clean, dry, wet or dirty gas / steam
Can be installed on the outlet of compressors

Outputs

Modbus & 4-20mA

Pipe Size

DN15 to DN300

IP Rating

IP67



Mini Flow Meter

For point of use applications

Installation

Inline

Pressure Range

0 to 16 bar (232psi)

Bi-directional

No

Gas Quality

Clean dry gas

Outputs

Modbus & 4-20mA

Pipe Size

DN3 to DN40

IP Rating

IP54



Strength

- We export to almost 100 countries.
- We have more than 2000 global customers.
- We can provide a total filtration solution.

- Filter-Online & Nordic Filtration offers a wide selection of filtration products for Domestic and Industrial Application.

- You can buy our products on our websites or by contacting us by phone or e-mail. Information about our products as well as brochures and manuals can be found on our websites:

www.filter-online.com for Domestic Products

nordicfiltration.com for Industrial Products

We distribute many of our products from our stock in Denmark. Some products are shipped from remote stock.



Filter-Online & Nordic Filtration ApS
Glasvænget 6
5492 Vissenbjerg
Denmark

Filter-Online
+45 70 40 42 22
info@filter-online.com
www.filter-online.com

Nordic Filtration
+45 72 25 10 00
info@nordicfiltration.com
nordicfiltration.com