



## Specifications


### Spun Cartridge CSS



Size, "(inch):	10", 20", 30", 40"
Filtration rating, µm:	1, 5, 10, 25, 50, 75, 100
Flowrate, l/min:	x
Max. Temp. C°:	120
Diff. Pressure:	x
Efficiency, %:	80
Connection:	DOE
Material:	Cotton
O-ring:	x
Approval(s):	EC1935/2004, FDA

The Spun range is offered in media with a wide span of micron ratings and is perfectly suited for prefiltration steps to protect secondary or final filtration systems.

Cotton is used principally where polypropylene is incompatible with the filtrate, the bleached cotton of the Spun CSS, which meets FDA standards, is specifically designed for water and food applications, with its 304 stainless steel core ensuring high temperature capabilities.

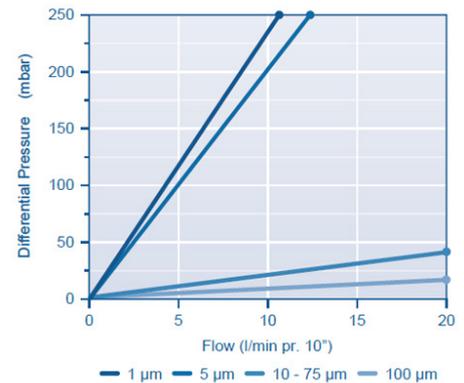

Dimensions (mm)			
Size	B	C	A
10"	254	63	28
20"	508	63	28
30"	762	63	28
40"	1016	63	28

