

Type 2-BFOS-DU

Duplex Bag Filter Unit

The duplex filter units series 2-BFOS-DU are modular filter units to install two filter bag size 2 (2x 0,5 m²). Two standard bag filter housings of series BFOS are piped together. The design of the housing allows the use of Standard and High Efficiency bags and a wide variety of O-ring materials with no change in design. Additional connections on both sides and a cast-bolting allow fast mounting of a diff. pressure gauge. The duplex filter unit are internally and externally electropolished and delivered with adjustable tripod stands. Instead of the manual valves pneumatical or electrical valves can be equipped. Also a lid indicator can be additional equipped to work semi-automatic. On request we delivery units with 3, 4, 6, 8 filter single filter housings for a non-stop operation.

TECHNICAL DATA

2-BFOS-DU


Optional:

Inlet- and Outlet connection (N1/N2)	DN80 / DN100
Vent, Pressure Gauge (N3, N4)	4x Rp 1/4
Drain (N5)	2x Rp 1/2
Diff. pressure gauge (N6, N7)	Rp 1/4
Material housing/closure disc	AISI 304 / AISI 316*1
Material butterfly valve	Steel coated
Gasket housing	O-ring FPM*2
Gasket butterfly valve	Profile gasket EPDM*2
Max. Pressure	10 bar
Max. Temperature	-10/+80°C



*1 available on request

*2 other gasket materials are possible

pneumatical



electrical

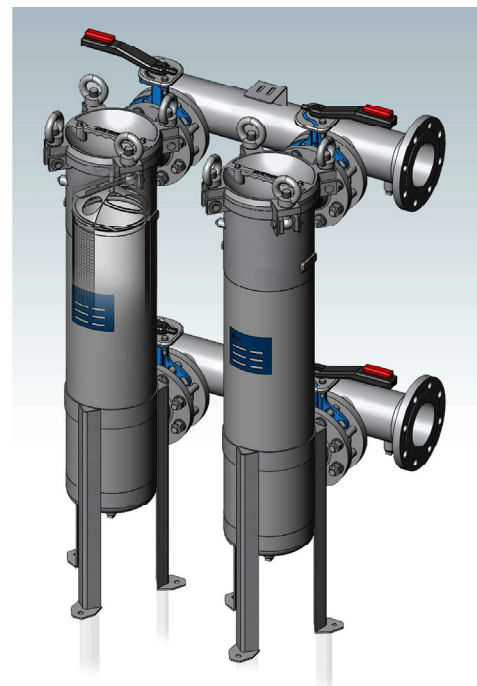

ORDERING INFORMATION OF FILTER UNITS 2-BFOS-DU

2-BFOS2-OV/F80-A2

Unit type
2-BFOS = Bag filter-sidliner
Bag filter size
2 = size 2, ca. 2x 0,50 m²
Closure valve
OV = without valve
KVGE = with valve

Material
A2 = Stainl. Steel AISI 304
A4 = Stainl. Steel AISI 316 (on request)

Connection
F80 = Flange DN80 PN16;
DIN 2633, C
F100 = Flange DN100 PN16;
DIN 2633, C

CONSTRUCTION

- Declaration of conformity acc. DGRL 2014/68/EU • Classification acc. Art.4, Paragraph 3
- Approved for the operation with fluids only of group 2 (not dangerous)

DIMENSIONS


Optional: with customized connections

Version OV: H/J = - 40 mm +/- 5 mm

Unit type	connect. I/O (N1/N2)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)
2-BFOS2-F80	DN80 PN16	110	680	1081	Ø204	182	400	150	640	787	375
2-BFOS2-F100	DN100 PN16	110	660	1099	Ø204	182	400	180	677	787	400


Subject to technical alterations.
AL1092-00-E

acuraLine®

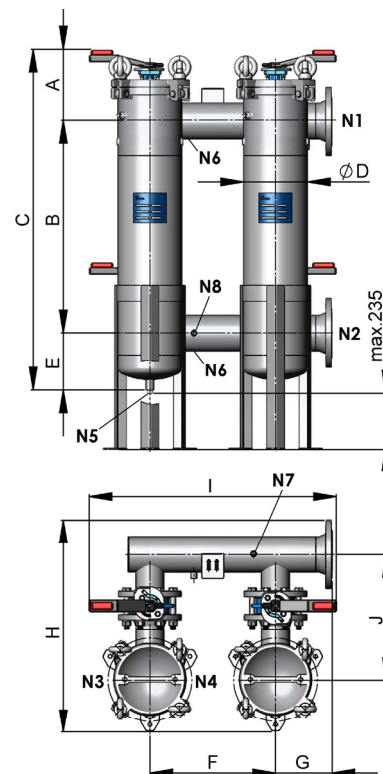

OPTIONAL

differential pressure gauge mounted



Nordic Filtration

At www.nordicfiltration.com you will find a wide selection of filtration products ready for you to order.

Nordic Filtration offers a wide selection of filtration products for water treatment. We have stock in Denmark from where we distribute all of our products to Scandinavia and the the rest of the world.

You can buy our products on local websites or by contacting us by phone or e-mail. Information about our products as well as brochures and manuals can be found on our website (www.nordicfiltration.com).

We can adapt all of our filtration products to your needs, and we offer visits from our consultants in order to find the right solution for you.



Filter-Online & Nordic Filtration ApS
Glasvænget 6
5492 Vissenbjerg
Denmark

+45 72 25 10 00
info@nordicfiltration.com
www.nordicfiltration.com