

Zero Loss Condensate Drain





Specifications

Size, "(inch):	-
Filtration rating, µm:	-
Flowrate, l/min:	see table
Temp.range C°:	1-60°C
Pressure-range:	0-16bar
Efficiency, %:	-
Connection:	see table
Material:	Plastic
O-ring:	-
Approval(s):	-

Zero Loss Condensate drains with level control ensure loss free condensate discharge.

In compressed air systems condensate and contaminants contained in it can cause considerable damage to the compressed air lines. The tasks of condensate drains is to remove the condensate from the pressurised air system safely.

Dimensions (mm)				Max. working pressure	Temperature range	Connections
Model	Compressor capacity	Dryer Capacity	Filter Capacity			
UAD100	180 m ³ /h	360 m ³ /h	1800 m ³ /h	16bar	1-60°C	Inlet: ½" BSP-M Outlet: Ø12mm
UAD150L	450 m ³ /h	900 m ³ /h	4500 m ³ /h			
UAD333	600 m ³ /h	1200 m ³ /h	6000 m ³ /h			
UAD1000	1800 m ³ /h	3600 m ³ /h	18000 m ³ /h			
UAD5277	9500 m ³ /h	19000 m ³ /h	95000 m ³ /h			

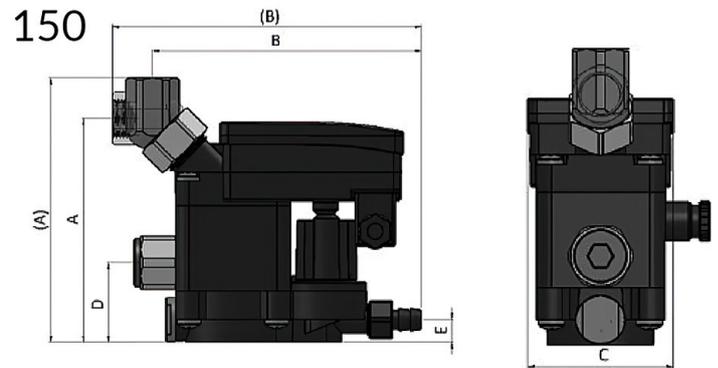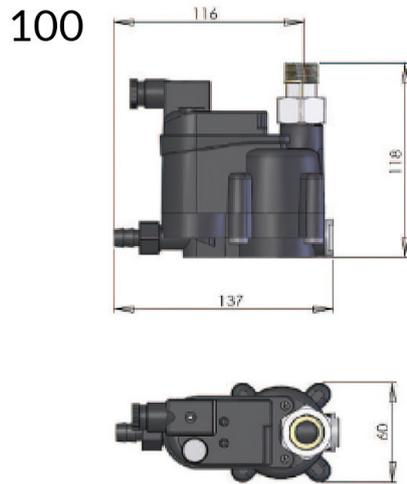

Dim. (mm)	A	(A)	B	(B)	C	D*	E
	118	140	141	163	69	42	12

* Secondary inlet connection.

