

Nordic *Filtration*



MESH BAG FILTER

www.nordicfiltration.com



Technical Data

AISI 316 (1.4401)

Max. 200°C

Max diff. pressure 2,5 bar

50, 100, 200, 500, 1000µm

Notes:

Attend protective note according DIN ISO 16016

Tolerance acc.

DIN ISO 2768-m

DIN ISO 13 920

DIN 28005-S





Specification

Filtration rates	50, 100, 200, 500, 1000µm *
Material	AISI 316 (1.4401)
Max. diff. pressure	2,5 bar
Max. temperature	200°C
Volume	Size 1 (7l) Size 2 (14l)
Filter area	Size 1: 0,2 m ² Size 2: 0,4 m ²
Material gasket	FPM (others on request)
Weight	Size 1: 1,5kg Size 2: 3,0kg
Gasket options: NBR, EPDM, FEP-O-SEAL, Kern (core) FPM (FDA)	

*in filtration rate less than 100µm, an O-ring must be used to ensure bypass-free filtration.

The basket filter in stainless steel constructions with cylindric vessel, flat bottom and handle.

The large filter area allows high capacity and the filter can be cleaned again and again, and therefore has a longer service life.

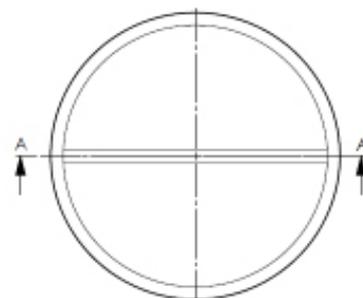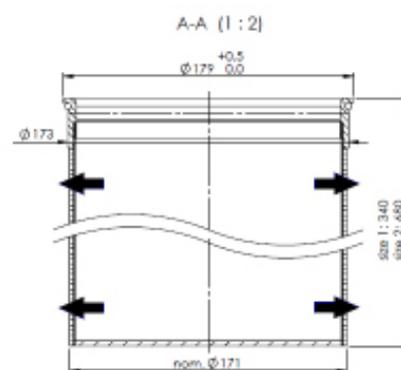

Nordic Filtration

At www.nordicfiltration.com you will find a wide selection of filtration products ready for you to order.

Nordic Filtration offers a wide selection of filtration products for water treatment. We have stock in Denmark from where we distribute all of our products to Scandinavia and the the rest of the world.

You can buy our products on local websites or by contacting us by phone or e-mail. Information about our products as well as brochures and manuals can be found on our website (www.nordicfiltration.com).

We can adapt all of our filtration products to your needs, and we offer visits from our consultants in order to find the right solution for you.

