


Housing specification

Name	Inner surface
Designed pressure (bar)	0-16
Operating Tem °C	-10-180
Pressure tolerance on weld	0.85
Corrosion by acid (mm)	

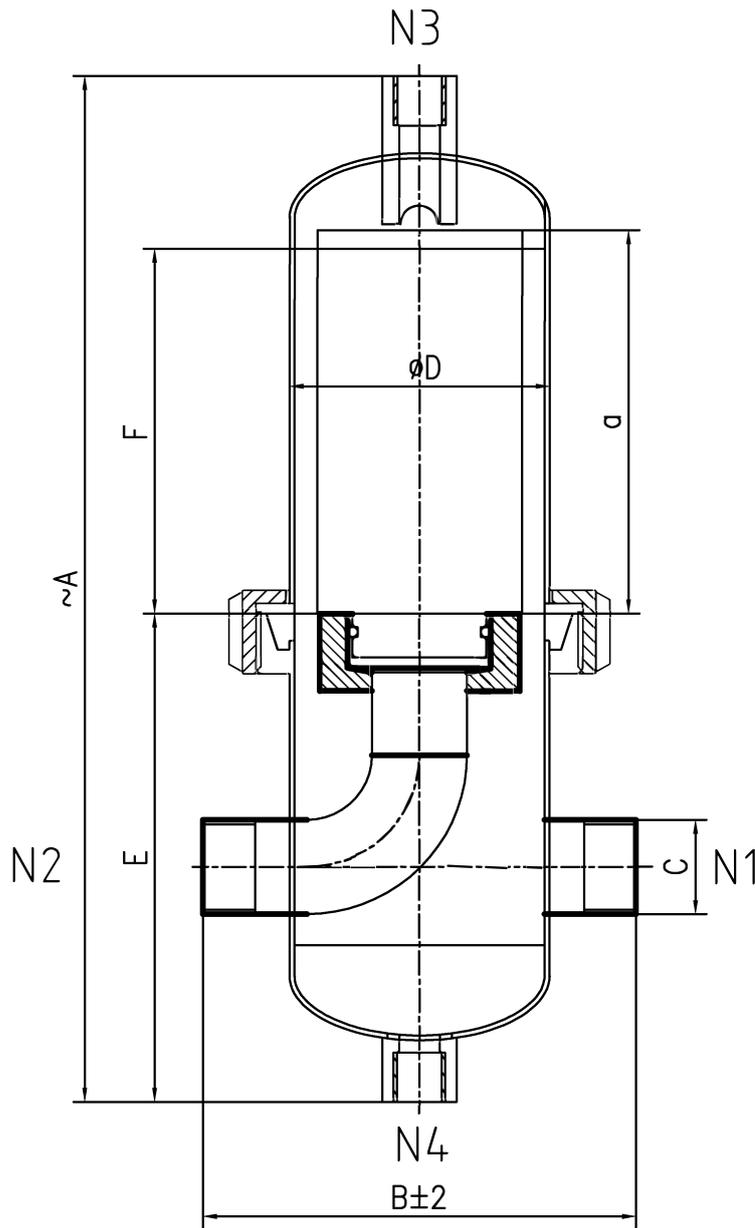

size	A mm	B mm	C Bmm	ØD mm	E mm	F mm	a mm	elemen
0006	210	107	1/4"	70	102		76	03/1'
0009	278	135	3/8"	70	136	99	104	04/1'
0012	278	135	1/2"	70	136	99	104	04/2'
0027	325	150	1"	85	159	115	128	05/2'
0036	382	150	1 1/4"	85	164	167	180	07/2'
0048	418	180	1.5"	104	194	162	180	07/3'
0072	507	180	2"	104	209	236	254	10/3'
0108	634	180	2"	104	209	363	381	15/3'

Nozzles

item	name	speci	qty	material	qty
N1	inlet	size C	1	SUS316L	BSPF
N2	outlet	size C	1	SUS316L	BSPF
N3	plug	1/4"	1	SUS316L	G
N4	---	1/4"	1	SUS316L	

DUTY	SIGN	DATE	Itbm.NO	Drawing NO.	KS2021-1000-01	
Designer			P-DD Filter Housing			
Verified						
Approved						
STD			Scale: 1:2	UNIT mm	Page 1	Totally