



P-AK

ACTIVATED CARBON FILTER ELEMENTS

fits Donaldson P-EG, PG-EG & P-BE housings

Process Filtration

Adsorption filter elements for removing hydration (oil) vapors and odors.

Donaldson® P-AK adsorption activated carbon filter elements consist of two filter stages. At the activated carbon first stage, the P-AK filter removes oil, hydrocarbon vapors and odors by adsorption. Particles are removed at the microfiber fleece depth filter layer. In addition, a support fleece and an outer stainless steel support sleeve ensure structural integrity of the adsorption and filter stages.

A special flow insert ensures optimum flow distribution through the filter from inside to outside. This creates minimum pressure loss and ensures maximum usage of the filter material.

By using appropriate pre-purification (P-FF, P-MF or P-SMF), a residual oil content of $<0.003 \text{ mg/m}^3$ may be achieved.

APPLICATIONS

P-AK adsorption filter elements are ideal in the following industries and applications:

- Chemical
- Petrochemical
- Pharmaceutical
- Breathing air supply
- Pre-filtration of sterile air
- Filling machines
- Packaging machines
- Food & Beverage
- Instrumentation and control air



P-AK


FEATURES	BENEFITS
Activated carbon media	High adsorption capacity and improved efficiency ensure optimum purification performance over the filter life
Flow diffuser at filter inlet	Reduces flow resistance and ensure optimum air flow through the adsorption material
Activated carbon incorporated into filter support	Prevention of activated carbon abrasion
Microfiber fleece depth filter stage	Improved particle retention - class 2 according to ISO8573-1 achievable

SPECIFICATIONS

MATERIALS

Adsorption Stage	Activated carbon granulate, embedded into PUR ester foam
Filter Media	Activated carbon
Support Fleece	Polyamide fleece
Bonding	Polyurethane
End Caps	304 SS
O-Rings	Buna
Support Sleeves	304 SS

Adsorption Filter Design

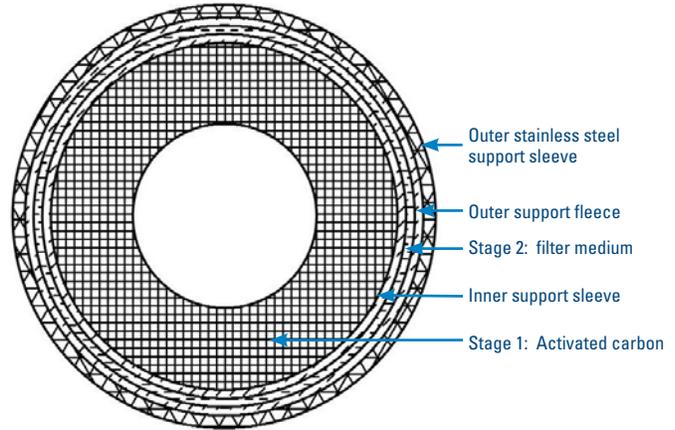

Inside-to-Outside Flow

P-AK ELEMENT ADSORPTION EFFECTIVENESS

Ethane	Slight
Toluene	Very good
Acetic Acid	Very good
Methanol	Good
Acetone	Good
Isopropyl Ether	Very good
Methyl Acetate	Good
Sulphuric Acid	Very good
Hydrogen Sulphide	Poor
Chlorine	Good
Freon	Poor
Ammonia	Poor
Citrus Fruits	Very good
Perfumes	Very good

Retention Rate	Residual oil content <0.01 mg/m ³ – use submicrofilter SMF element
Initial Differential Pressure at Nominal Flow	0.069 bar (1.0 PSI)
Recommended Application Temperature	10° C - 40° C (50° F - 104° F). Temperature maximum = 60° C (140° F) Adsorption efficiency decreases at higher temperatures)
Recommended Replacement Interval	2,000 operating hours

Important Notice: Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc.
Minneapolis, MN

donaldson.com
shop.donaldson.com

Australasia 61-02-4350-2066
marketing.australia@donaldson.com

Brazil 55-11-4894-6035
vendas.brasil@donaldson.com

China 86-400-921-7032
info.cn@donaldson.com

EMEA 49-2129-569-0
cap-europe@donaldson.com

India 91-124-4807-400
indiaenquiries@donaldson.com

Japan 81-42-540-4123
ndl-ultrafilter-web@donaldson.com

Korea 82-2-517-3333
cap-kr@donaldson.com

Latin America 52-449-300-2442
industrialair@donaldson.com

North America 800-543-3634
processfilters@donaldson.com

South Africa 27-11-997-6000
samarketing@donaldson.com

Southeast Asia 65-6311-7373
sea.salesenquiry@donaldson.com

Nordic Filtration

At www.nordicfiltration.com you will find a wide selection of filtration products ready for you to order.

Nordic Filtration offers a wide selection of filtration products for water treatment. We have stock in Denmark from where we distribute all of our products to Scandinavia and the the rest of the world.

You can buy our products on local websites or by contacting us by phone or e-mail. Information about our products as well as brochures and manuals can be found on our website (www.nordicfiltration.com).

We can adapt all of our filtration products to your needs, and we offer visits from our consultants in order to find the right solution for you.

