



Technical Data

Temperature range: -10/+80°C

Max Pressure: 10 bar

Volume: 7L

Empty weight (without foot): max. 10kg

Empty weight (with foot) : max. 17kg

The tanker wagon filter series F-SF-TW are compact cylindrical housings with a flat lid.

The lid is closed by a quick closure, which ensures a very rapid disassembly of the screen basket without tools. The inlet and outlet is equipped with a connection coupling.

This allows a easy expansion of a tanker hose or a container tank with a safety filter. The tank wagon filter series F-SF-TW are equipped with and without foot. On request the filter can be supplied with a differential pressure gauge, which can optionally be equipped with an electrical contact.

Materials

Material Housing	1.4301 / 1.4571
Material Gasket	FPM *1

*1 other gasket materials are possible

Connection types / rate



Connection	External thread (with coupling)
micron rate *2	100, 200, 250, 500, 1000µm
Max. Flow rate	up to 70 m3/h *3

*2 other micron rates on request

*3 with respect to the aqueous medium with a micron rate of 500

Dimensions	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
F-SF 50	316	365*	ø204	390	350	200	320
F-SF 80	316	372	ø204	390	350	200	320
F-SF 100	316	389	ø204	390	350	200	320

Subject to technical alterations.

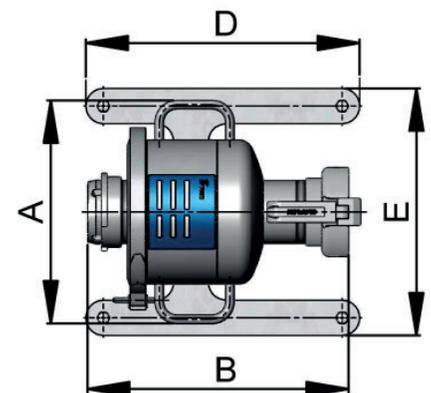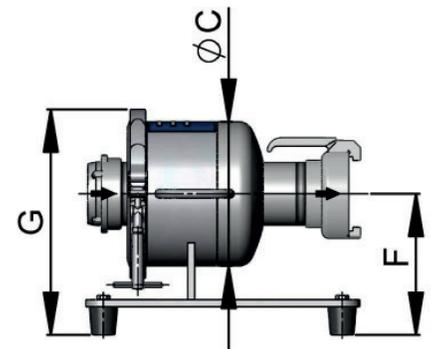

Nordic Filtration

At www.nordicfiltration.com you will find a wide selection of filtration products ready for you to order.

Nordic Filtration offers a wide selection of filtration products for water treatment. We have stock in Denmark from where we distribute all of our products to Scandinavia and the the rest of the world.

You can buy our products on local websites or by contacting us by phone or e-mail. Information about our products as well as brochures and manuals can be found on our website (www.nordicfiltration.com).

We can adapt all of our filtration products to your needs, and we offer visits from our consultants in order to find the right solution for you.

