SEPREMIUM 2 Serviceable

Oil/water separator for compressor capacities up to 2 m ^{3}/min.

PRODUCT FEATURES

As condensate flows in to the SEPREMIUM 2 Serviceable, the oil is filtered out through various filtration stages.

The SEPREMIUM 2 Serviceable is developed according to the latest ecological standard an convinces with its possible <5 ppm residual oil content.

High-performance elements ensure that the best environmentally compatible results are achieved, in addition to easy handling.

Our SEPREMIUM 2 Serviceable is installed with the mounting bracket (included in delivery). Replacing the SEPREMIUM 2 Serviceable elements is easy to do.

As soon as the condensate enters the SEPREMIUM 2 Serviceable, it is filtered through the various filter elements. The oil absorbing elements combine different types of adsorption technologies, assuring a result of less than 5 ppm residual oil content at the exit can be achieved.

COMMERCIAL BENEFITS

- Application of high-quality filtration material
- Simple, quick and clean installation and replacement process
- Successful separation of mineral oil, synthetic oil and stable condensate emulsions
- Bracket for wall mounting included
- Brass hose connectors ensure quick and stable installation
- Easy installation and maintenance

TECHNICAL ADVANTAGES

- Any type and design of condensate drain can be used
- Special designs are available to treat the condensates from "stable condensate emulsions" and polyglycol powered compressed air systems
- First class value for money
- Compact dimensions ensure easy handling and installation

THE CONDENSATE MANAGEMENT

SEPREMIUM 2 Serviceable

Oil/water separator for compressor capacities up to 2 m ^{3}/min.

DIMENSIONS

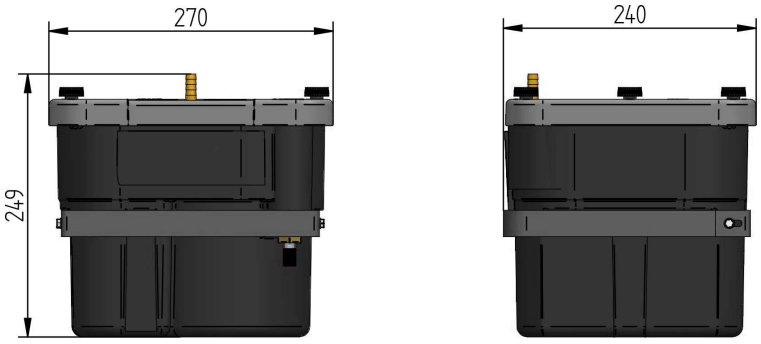

Max. compressor capacity	2 m^3/min.
Max. oil adsorption	2 Litres
High performance white element	1
Activated carbon element	1
Inlet connection	1/2" with 10 mm hose
Outlet connection	1/2" with 13 mm hose
TEST valve	Yes
Housing material	PP
Housing color	Black
Lid color	Grey
TEST kit included	Yes
Target oil residue output value	<5ppm
Inlet and outlet hose pipe connectors	Included
DIBT	Yes

SEPARATION OF:

Mineral lubricants	Yes
Synthetic lubricants	Yes
Stabile emulsions	Yes
Polyglycol	Yes

*We would be happy to advise you on any open questions or on the use of larger compressor capacities

JORC is NEN-EN-ISO 9001:2015 certified

The above information is accurate and complete. Nevertheless, we assume no responsibility for the use of the products or any violations of patents or third-party rights that result from the use of the products. In addition, the manufacturer reserves the right to rev information without prior notice and without further obligation.

At www.nordicfiltration.com you will find a wide selection of filtration products ready for you to order.

Nordic Filtration offers a wide selection of filtration products for water treatment. We have stock in Denmark from where we distribute all of our products to Scandinavia and the the rest of the world.

You can buy our products on local websites or by contacting us by phone or e-mail. Information about our products as well as brochures and manuals can be found on our website (www.nordicfiltration.com).

We can adapt all of our filtration products to your needs, and we offer visits from our consultants in order to find the right solution for you.

Filter-Online & Nordic Filtration ApS
Glasvænget 6
5492 Vissenbjerg
Denmark

+45 72 25 10 00
info@nordicfiltration.com
www.nordicfiltration.com